

EASY PLANT LOWERING / RollerHook, 541as (540m, 541sp)

The process of plant's lowering is one of the most time-consuming tasks for workers. Not only it is difficult to control the lowering height, but also the plants can be damaged.

Designed to ensure a full control of the plant's lowering at minimum cost, the RollerHook is composed of a re-usable metal frame and a disposable spool. RollerHook is the perfect solution for an easy and efficient trellising of greenhouse tomato plants.


Advantages

Efficient labor

- Simple to operate
- Provides a significant increase in yield and quality - the plant is supported as it grows upwards and continues to produce fruits
- Spools come with 25 - 48 meters of UV resistant twine
- For Cherry tomatoes - available with double twine on one spool (2X17) to allow the lowering of two stems at the same time
- The twine is released from the RollerHook while the plant is leaning
- Slow release of the twine provides full control
- The fruits are picked from ground level
- Suitable for 2.5 to 4.0 mm trellising wire
- Multi-seasonal - change the spool when the twine is finished

Crop protection

- Ensures full control of lowering length and plant height
- Designed to prevent slipping off the trellising wire
- Plant is lowered smoothly and gently

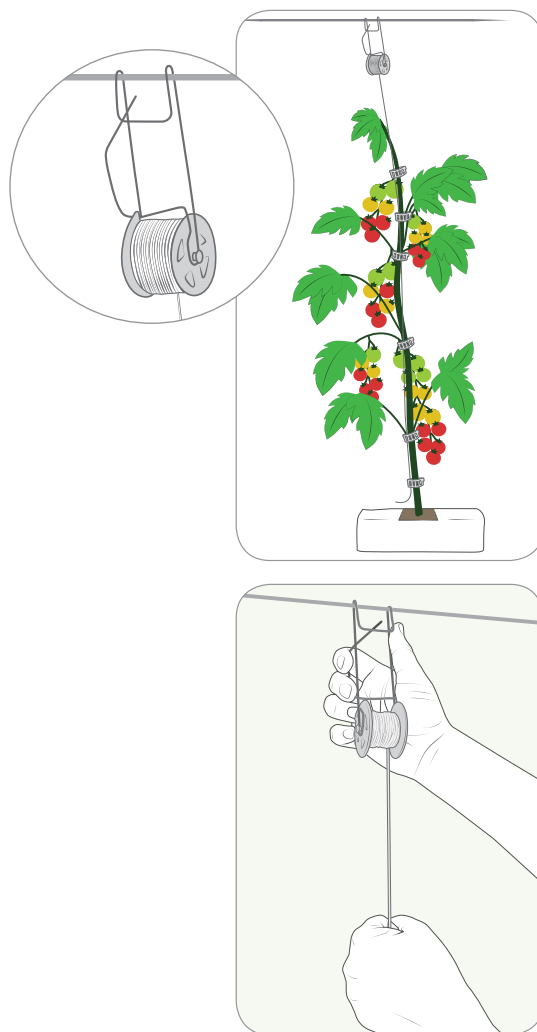

Instruction of use

To install RollerHook on the trellising wire:

1. Hang RollerHook on the trellis wire
2. Verify that the locking handle faces the direction in which the plant is lowered

To lower the plant:

1. Hold the twine in one hand
2. Using the other hand, squeeze the locking handle to release the stopper
3. Release the twine downwards while moving RollerHook along the trellis wire in the direction that the plant is lowered